

Max. Flow Rate: 285 GPH (1,080 LPH)

- Separ 2000 series water separators fuel filters are a simple solution to many different fuel related problems.
- Five separate stages of filtration ensure 99.9% water separation (Certified TUV Report using SAE J1839) at maximum flow.
- Low restriction reduces wear on fuel pumps and ensures full RPMs.
- Backflushable (cleanable) element reduces down time and costly element changes.
- Marine version with U.S. Coast Guard-accepted metal heat deflector.

## INDUSTRIAL



## MARINE



Shown: Industrial (left to right) 2000/18, 2000/18U  
Marine (left to right) 2000/18D-G, 2000/18UD-G

### Inlet / Outlet Connections

Single Unit: 1 1/16-12 Straight o-ring SAE  
Duplex Unit: Shipped with #12 Male JIC Flare  
(other adapters available)  
Inlet and Outlet Pipe connection 22mm.

### Ordering Specifications


SWK-2000/18 U M MK K KD D A - G

Duplex \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Metal bowl \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Metal bowl w/ contacts \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Clear bowl w/ water contacts \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Clear bowl w/ metal heat deflector and water contacts \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Clear bowl w/ metal heat deflector \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Automatic switchable duplex \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_  
 Gauge \_\_\_\_\_ U \_\_\_\_\_ M \_\_\_\_\_ MK \_\_\_\_\_ K \_\_\_\_\_ KD \_\_\_\_\_ D \_\_\_\_\_ A \_\_\_\_\_ G \_\_\_\_\_


(See page 18 for details)

We reserve the right to alter the specification without prior notice.


### Pressure Drop

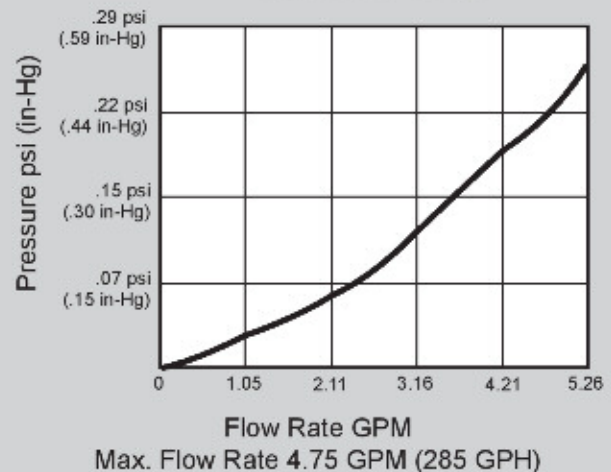

### INDUSTRIAL

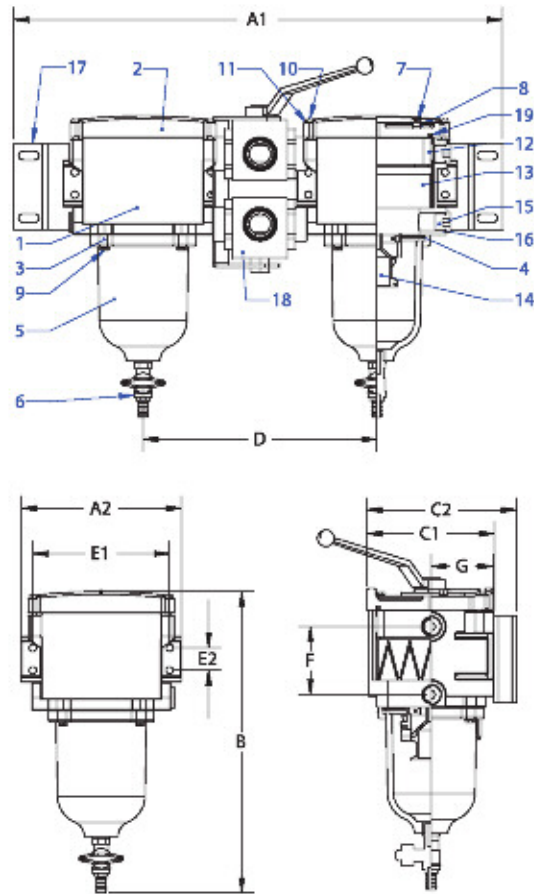

### MARINE

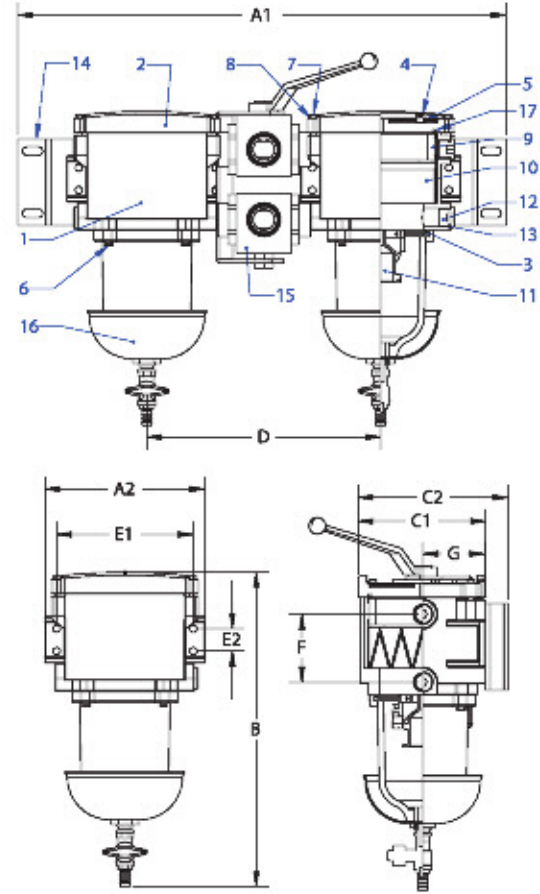

Item	Part #	Description	Dimension		Item	Part #	Description	Dimension		
1	30428	Housing	A1	25.5"	1	30428	Housing	A1	25.5"	
2	30572	Lid		(446.4mm)	2	30572	Lid		(446.4mm)	
3	30575	Retaining Ring	A2	8.34"	3	30423	Bowl Gasket	A2	8.34"	
4	30423	Bowl Gasket		(211.8mm)	4	30408	Bleed Screw		(211.8mm)	
5	30986	Bowl	B	15.7"	5	30558	Bleed Screw Gasket	B	15.7"	
6	30343	Drain Valve		(398.8mm)	6	30567	Bowl Screw		(398.8mm)	
7	30408	Bleed Screw	C1	6.6"	7	30452	Lid Screw	C1	6.6"	
8	30558	Bleed Screw Gasket		(168.3mm)	8	30448	Washer	C2	7.83"	
9	30567	Bowl Screw	C2	7.83"	9	30298	Spring Frame	C2	7.83"	
10	30452	Lid Screw	D	12.2"	10	01810	Filter Element	D	12.2"	
11	30448	Washer		(309.2mm)		01830	10 Micron		(309.2mm)	
12	30298	Spring Frame	E1	7.12"		01830	30 Micron (standard)	E1	7.12"	
13	01810	Filter Element		(180.15mm)		01860S	60 Micron (stainless steel)		(180.15mm)	
	01830	10 Micron	E2	1.17"	11	30429	Centrifuge	E2	1.17"	
	01860S	30 Micron (standard)		(29.6mm)	12	30705	Plug		(29.6mm)	
		60 Micron (stainless steel)	F	3.55"	13	30721	Plug O-Ring	F	3.55"	
14	30429	Centrifuge		(90.1mm)	14	30466	Mounting Bracket	G	3.25"	
15	30705	Plug	G	3.25"	15	30465	Reversing Valve Assembly		(82.6mm)	
16	30721	Plug O-Ring		(82.6mm)						
17	30466	Mounting Bracket	<b>Model</b>		<b>Weight</b>		<b>Model</b>		<b>Weight</b>	
18	30465	Reversing Valve Assembly	SWK-2000/18	10.5 lbs			SWK-2000/18D	11 lbs		
19	30421	Lid Gasket	SWK-2000/18U	34.5 lbs			SWK-2000/18UD	35.5 lbs		
				(15.65 kg)				11 lbs	(4.99 kg)	
								35.5 lbs	(16.10kg)	